


e-Starq BMS 4/27/2020

CAN₊ to Heater / motor controller / Charger / console
terminated inside

RS485
From BT 7

X9 BMS Valence UCharge 2U-BMS-XP-HV
18 generation 2006

K11 B6K

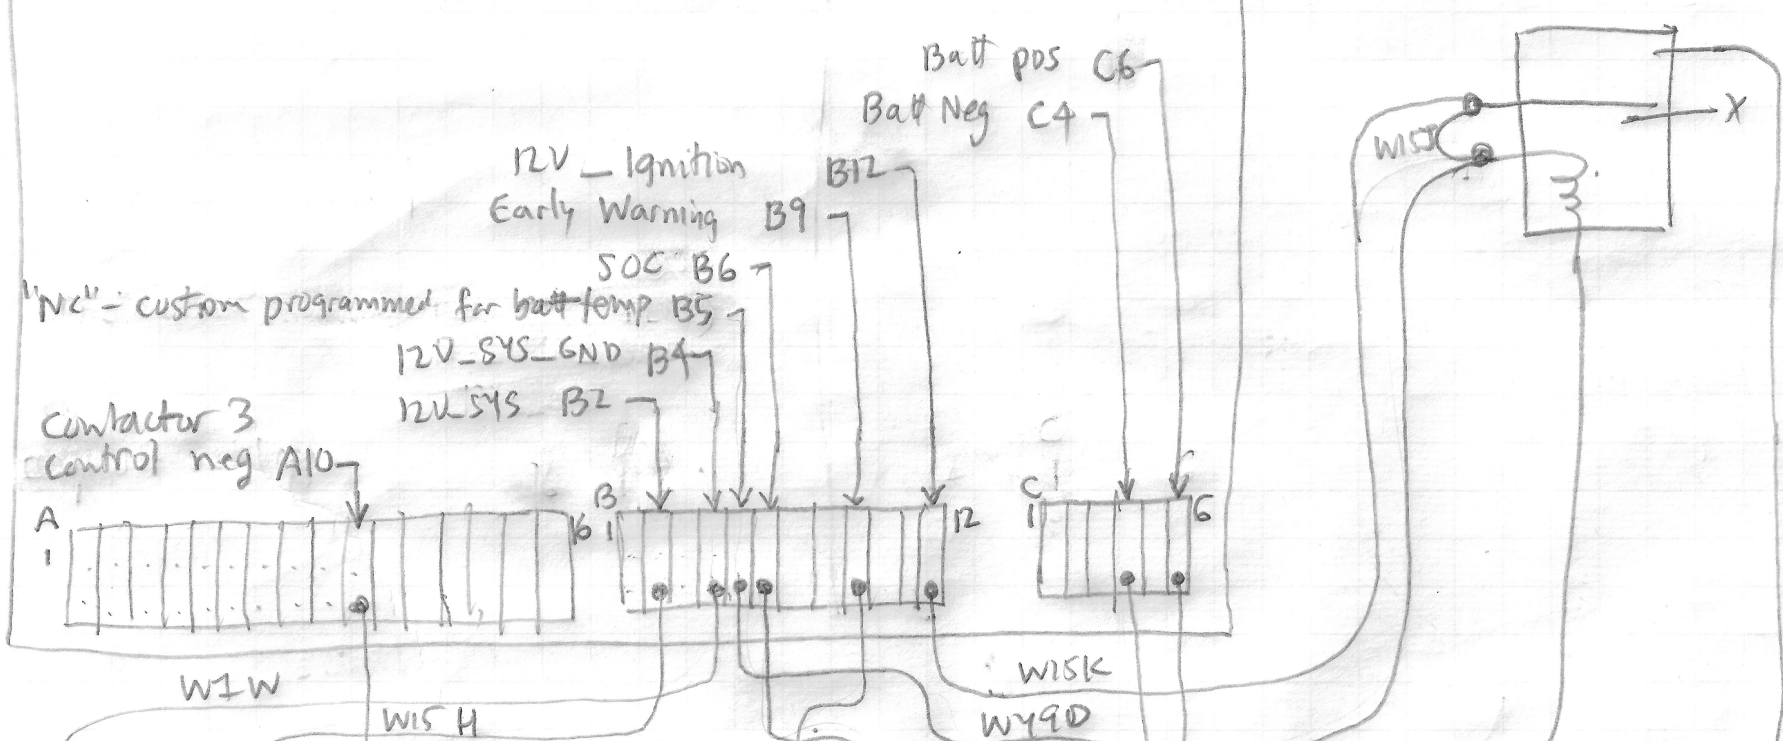


Contactor 3
control neg A10

"NC" - custom programmed for batt temp B5
12V_SYS_GND B4
12V_SYS B2

12V_Ignition
Early Warning B9

Batt pos C6
Batt Neg C4

ⓓ

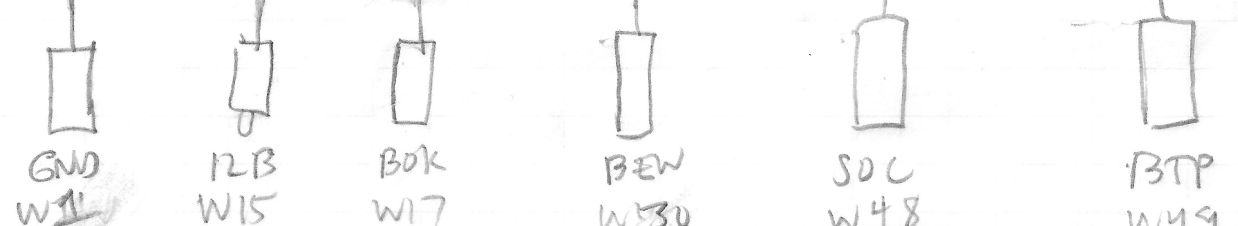

High Voltage
orange
cable assy

TO RADIATOR BOX